
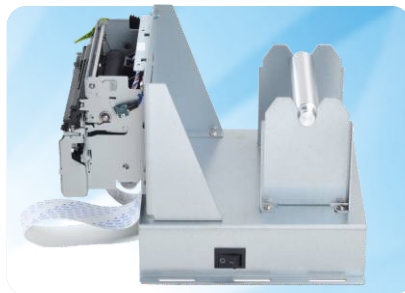
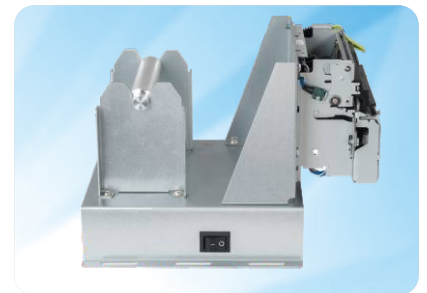
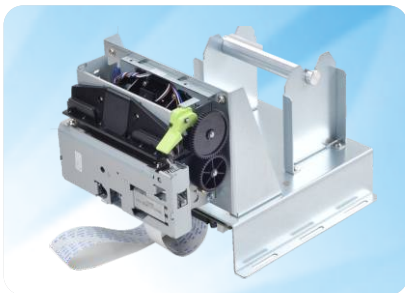


XP-TS80



Panel Printer

- Support QR CODE Printing
- Support wall mountable and truck cable
- Change IP through Web or Serial port
- Support overtype function

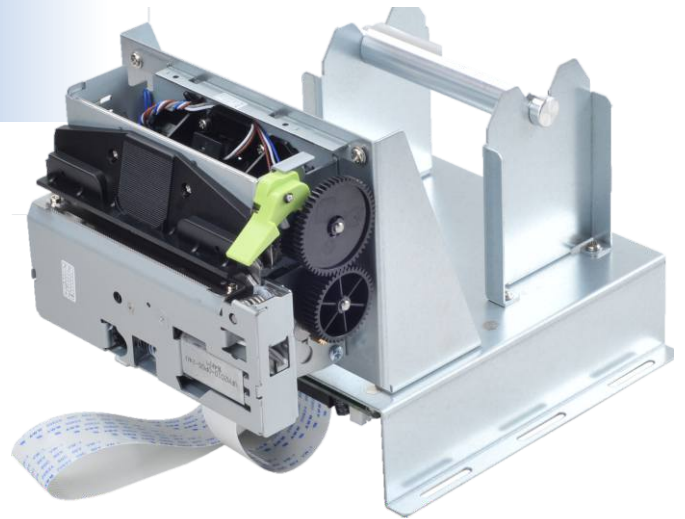

XP-TS80

Panel Printer

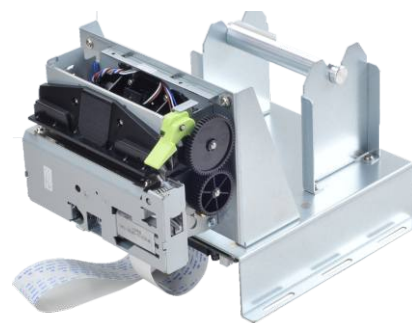

Printing		XP-TS80
Printing method		Direct thermal
Paper width		79.5±0.5mm
Print width		72mm
Column capacity		576 dots/line
Printing speed		200 mm/s
Interface		USB+Serial
Line spacing		3.75mm
Character size		ANK, Font A: 1.5×3.0mm (12×24 dots) Font B: 1.1×2.1mm (9×17 dots) Chinese, traditional Chinese: 3.0×3.0mm (24×24 dots)
Column number		Font A - 42 columns or 48 columns/ Font B - 56 columns or 64 columns/ Chinese, traditional Chinese - 21 columns or 24 columns
Barcode Character		
Extension character sheet		PC347(Standard Europe) / Katakana / PC850(Multilingual) / PC860(Portuguese) / PC863(Canadian-French) / PC865(Nordic) / West Europe / Greek / Hebrew / East Europe / Iran/WPC1252 / PC866(Cyrillic#2) / PC852(Latin2) / Pc858 / IranII / Latvian / Arabic / PT151(1251)
Barcode types		UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
2D Barcode		QR CODE
Input buffer		4096 Kbytes
NVFlash		256 Kbytes
Power		
Power source		Output: DC 24V/2.5A
Cash drawer output		DC 24V/1A
Physical characteristics		
Weight		1.8 KG
Dimensions		202.7 ×158×140 mm (D×W×H)
Environmental Requirements		
Operation environment		Temperature: 0~45℃ humidity : RH 10 ~ 80%
Storage environment		Temperature: -10~60℃ humidity: RH 10~90℃
Reliability		
Cutter life		1 million cuts
Printer head life		100 KM



Scan QR code to checkout Xprinter website for more update information.
Phone: (+86 756) 3895 852
Http://www.xprintertech.com
Email: overseas@xprinter.net

